

Starting Formulation

EPIKOTE Resin MGS LR385 EPIKURE Curing Agent MGS LH385-386 APPLICATION

Laminating resin system approved by the GERMAN FEDERAL AVIATION AUTHORITY with different pot lives for processing of glass, carbon and aramide fibers, featuring high static and dynamic loadability.

After heat treatment at 55 °C, the system meets the standards for gliders and motor gliders (operational temperatures -60 °C to +54 °C). In order to meet the standards for motor planes (operational temperatures -60 °C to +72 °C), heat treatment at 80 °C is necessary.

The range of pot lives is between approx. 20 min. and 2h. The curing agents have the same mixing ratio and can be mixed among themselves in any ratio. This permits a selection of the optimum system for all processing methods. After initial curing at room temperature, the components manufactured are workable and demouldable. You will receive high-gloss and non-tacky surfaces, even with unfavourable procuring conditions, e.g. lower temperatures or high humidities.

The mixing viscosity guarantees fast and complete impregnation of the reinforcement fibers; however, the resin will not spill out of the fabrics on vertical surfaces. In order to obtain special properties, it is also possible to add fillers to the mixture of resin/curing agent, such as Aerosil, microballoons, cotton flakes, metal powder, etc.

If high heat resistance or aircraft approval are not necessary, curing agent LH385 can also be used without heat treatment afterwards. However, the indicated properties will only be obtained after heat treatment at temperatures over 50 °C.

Epoxy resins are super cooled liquids, therefore crystallisation is immanently possible. In an early stage, crystallisation is visible as a clouding, and can progress to a stage, where the resin becomes a wax-like solid. This physical phenomenon is reversible and is no restriction to quality after its reversion, in fact a high purity of material will increase a tendency for crystallisation.

Crystallisation can be reversed by slow heating of the product to approx. 40 - 60 °C. If possible, stir the content or shake the container until the content clarifies. Use only completely transparent products.

Although LR385 is very unlikely to crystallize at low temperatures, storage conditions of 15 – 30 °C and low humidity are recommended. After dispensing material, the containers must again be closed carefully, to avoid contamination or absorption of water. All amine curing agents show a chemical reaction when exposed to air, known as „blushing“. This reaction is visible as white carbamide crystals, which could make the materials unusable.

The relevant industrial safety regulations for the handling of epoxy resins and curing agents for safe processing are to be observed.

EPIKOTE Resin MGS LR385 EPIKURE Curing Agent MGS LH385-386 SPECIFICATIONS

		Laminating resin LR385
Density ¹⁾	[g/cm ³]	1,16 – 1,20
Viscosity ¹⁾	[mPa·s]	700 – 1.050
Refractory index ¹⁾		1,535 – 1,545

Generated: April 6, 2021
 Issue Date:
 Revision:

© and ™ Licensed trademarks of Hexion Inc.

DISCLAIMER

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

		Curing agent	
		LH385	LH386
Density ¹⁾	[g/cm ³]	0,95 – 0,99	0,93 – 0,97
Viscosity ¹⁾	[mPa·s]	90 – 160	40 – 90
Refractory index ¹⁾		1,500 – 1,510	1,482 – 1,492
Potlife ²⁾	[min]	app. 20 min.	app. 60 – 70 min.
Tg _{pot} unconditioned	[°C]	90 – 100 °C	

Measuring conditions:

1) measured at 25 °C

2) measured at 30 °C

Epikote Resin MGS LR385 and Epikure Curing Agent MGS LH385-386 CHARACTERISTICS

Approval	German Federal Aviation Authority
Application	Production of gliders, motor gliders and motor planes, boat and shipbuilding, sports equipment, model airplanes, moulds and tools
Operational temperature	-60 °C up to +50 °C without heat treatment -60 °C up to +95 °C after suitable heat treatment
Processing	At temperatures between 15 °C and 50 °C, all common processing methods
Features	Good mechanical properties Pot life of approx. 20 min. to approx. 2 hours Not to be declared as toxic
Storage	Shelf life of 24 months in originally sealed containers

EPIKOTE Resin MGS LR385 EPIKURE Curing Agent MGS LH385-386 TEMPERATURE DEVELOPMENT

Generated: April 6, 2021


Issue Date:

Revision:

© and ™ Licensed trademarks of Hexion Inc.

DISCLAIMER

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

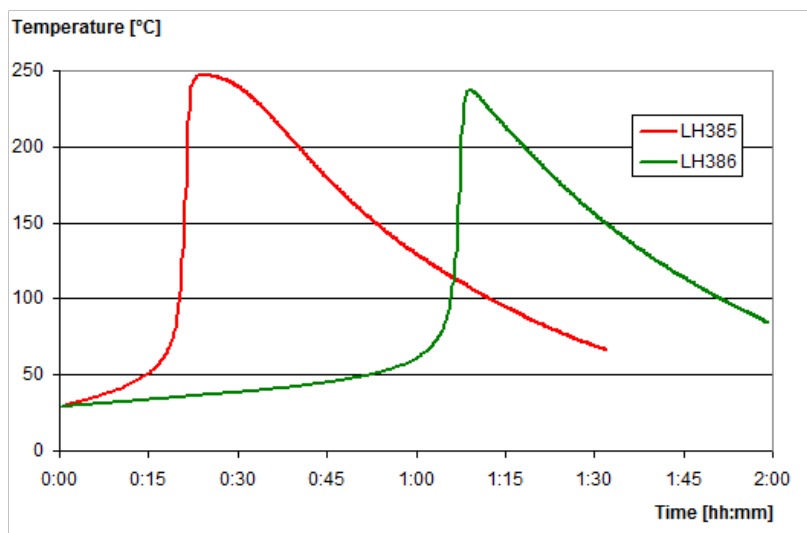

Measuring conditions: 100g / 30°C

Optimum processing temperature is in the range of 20 to 35 °C. Higher temperatures are possible, but will shorten pot life. A temperature increase of 10 °C will halve the pot life. Water (e.g. high humidity or contained in additional fillers) causes an acceleration of the resin/ curing agent reaction. Different temperatures during processing are not known to have significant impact on the mechanical properties of the cured product.

Do not mix large quantities – particularly of highly reactive systems – at elevated processing temperatures. As the heat dissipation in the mixing container is very slow, the contents will be heated up by the reaction heat (exothermic resin-curing agent reaction) rapidly. This can result in temperatures of more than 200 °C in the mixing container, which may cause smoke-intensive burning of the resin mass.

EPIKOTE Resin MGS LR385 EPIKURE Curing Agent MGS LH385-386 Gel time

	Curing agent	
	LH385	LH386
20 – 25°C	App. 2 – 3 h	App. 4 – 5 h
40 – 45°C	App. 45 – 60 min.	App. 90 – 110 min.

EPIKOTE Resin MGS LR385 EPIKURE Curing Agent MGS LH385-386 MECHANICAL DATA OF NEAT RESIN

Generated: April 6, 2021
 Issue Date:
 Revision:

© and ™ Licensed trademarks of Hexion Inc.

DISCLAIMER

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

Mechanical data		
Density DIN EN ISO 1183-1	[g/cm ³]	1,18 – 1,20
Flexural strength DIN EN ISO 178	[MPa]	120 – 130
Modulus of elasticity DIN EN ISO 178	[GPa]	3,3 – 3,6
Tensile strength DIN EN ISO 527-2	[MPa]	75 – 85
Compressive strength DIN EN ISO 604	[MPa]	120 – 140
Elongation at break DIN EN ISO 527-2	[%]	6,0 – 8,0
Impact strength ISO 179-1	[kJ/m ²]	45 – 60
Water absorption at 23°C DIN EN ISO 175	24h [%] 7d [%]	< /> 0,20 – 0,60
Curing: 24h at 23°C + 15h at 60°C		

Advice:
Mechanical data are typical for the combination of laminating resin LR385 with curing agent LH386. Data can differ in other applications.

EPIKOTE Resin MGS LR385 EPIKURE Curing Agent MGS LH385-386 MIXING RATIO

	LR385 : All curing agents
Parts by weight	100 : 35 ± 2
Parts by volume	100 : 43 ± 2

The mixing ratio stated must be observed very carefully. Adding more or less curing agent will not result in a faster or slower reaction – but in incomplete curing which cannot be corrected in any way. Resin and curing agent must be mixed very thoroughly. Mix until no clouding is visible in the mixing container. Pay special attention to the walls and bottom of the mixing container. All curing agents have blue colour to distinguish between resin and curing agents, and for easier identification of a correct mixing process. Although unlikely, deviations in colour are possible (e.g. due to UV radiation after longer exposure to sun light), but however have no effect on the processing and final properties of the material.


EPIKOTE Resin MGS LR385 EPIKURE Curing Agent MGS LH385-386 Viscosity of mixture

Generated: April 6, 2021
Issue Date:
Revision:

© and ™ Licensed trademarks of Hexion Inc.

DISCLAIMER

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

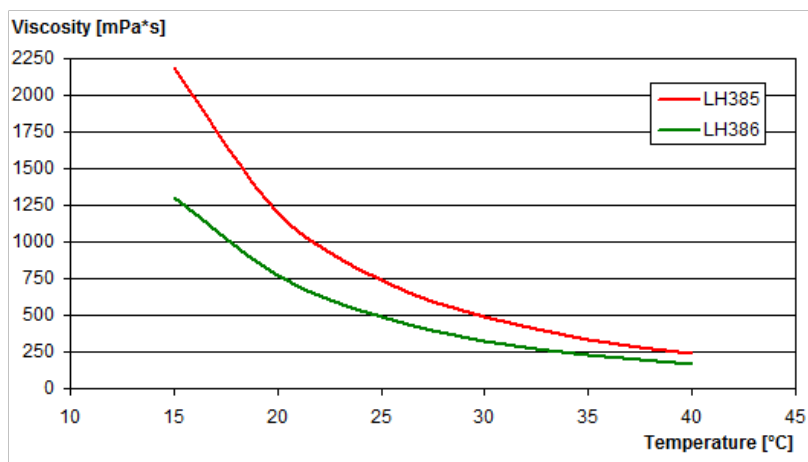

Measuring conditions: rotation viscosimeter, plate-plate configuration, measuring gap 0.2 mm

Disclaimer

© and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION, except that the product shall conform to Hexion's specifications.** Nothing contained herein constitutes an offer for the sale of any product.

Generated: April 6, 2021
 Issue Date:
 Revision:

© and ™ Licensed trademarks of Hexion Inc.

DISCLAIMER

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION, except that the product shall conform to Hexion's specifications.** Nothing contained herein constitutes an offer for the sale of any product.